

TUMBLE DRYERS

TWO IN ONE

MTD-2-25-MP

MTD-2-37-MP

FEATURES

- Construction in grey skinplate, stainless steel look.
- Big loading door (opening of 180°).
- Direct drive through a gearbox, no pulley.
- ELECTRONIC CONTROL: Easy and intuitive to use, the electronic control offers a complete control of the process.
- REVERSE DRUM: All models offer the reverse turning of the drum.
- STAINLESS STEEL DRUM standard.
- AXIRAD AIR FLOW: Mixed axial-radial airflow to optimise and maximise the airflow circuit in the drum.
- GENTLE DRY: The new drum with stamped holes makes sure the linen is gently handled.
- New filter drawer with wide surface and improved airflow.
- Cool Down: Anti-wrinkle at the end of cycle.
- Models available in electric or gas.

OPTIONS

- SMART DRY: Intelligent Moisture Control.
- FIRE EXTINGUISHER: Integrated Fire Extinguishing System.
- Double doorglass.
- Stainless steel body.
- Stainless steel front panel.
- Model versions in 60 Hz.
- Marine versions 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



ELECTRONIC CONTROL



AXIRAD AIR FLOW



REVERSE DRUM



SMART DRY



STAINLESS STEEL DRUM



FIRE EXTINGUISHER




FULL FLOW



GENTLE DRY

TECHNICAL DATA	UNIT.	MTD-2-25-MP	MTD-2-37-MP		
CAPACITY					
Capacity	Lb	25	37		
Capacity	Kg	11	16		
Hourly Output	Kg/h	34	53		
Evaporation capacity	l/h	17,5	27,4		
DRUM					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	547/1.522	547/1.522		
Load hole bottom height	mm	260/1.235	260/1.235		
Drum length	mm	475	746		
Drum volume	l	210	330		
POWER					
Drum motor power	Kw	0,25*2	0,25*2		
Fan Motor Power	Kw	0,25*2	0,25*2		
Total Installed power	Kw	25,1	25,1		
Electric Heating (Installed power)	Kw	12x2	12x2		
Gas heating (installed Power) in KW	Kw	12x2	12x2		
Gas heating (installed el. power)	Kw	1,1	1,1		
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 25 / 80A	4 x 1,5 / 20A	4 x 25 / 80A	4 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 40A	5 x 1,5 / 20A	5 x 10 / 40A	5 x 1,5 / 20A
DIMENSIONS / PACKING DIMENSIONS					
Width / Width	mm	785/865	785/865	785/865	785/865
Depth / Depth	mm	955/1.055	955/1.055	1.225/1.325	1.225/1.325
Height / Height	mm	1.980/2.126	1.980/2.126	1.980/2.126	1.980/2.126
Net weight / Gross weight	Kg	260/268	260/268	290/303	290/303
OTHERS					
Max airflow	m3/h	500*2	500*2	500*2	500*2
Ø Fume exhaust	mm	200	200	200	200
Sound level	dB	64	64	64	64

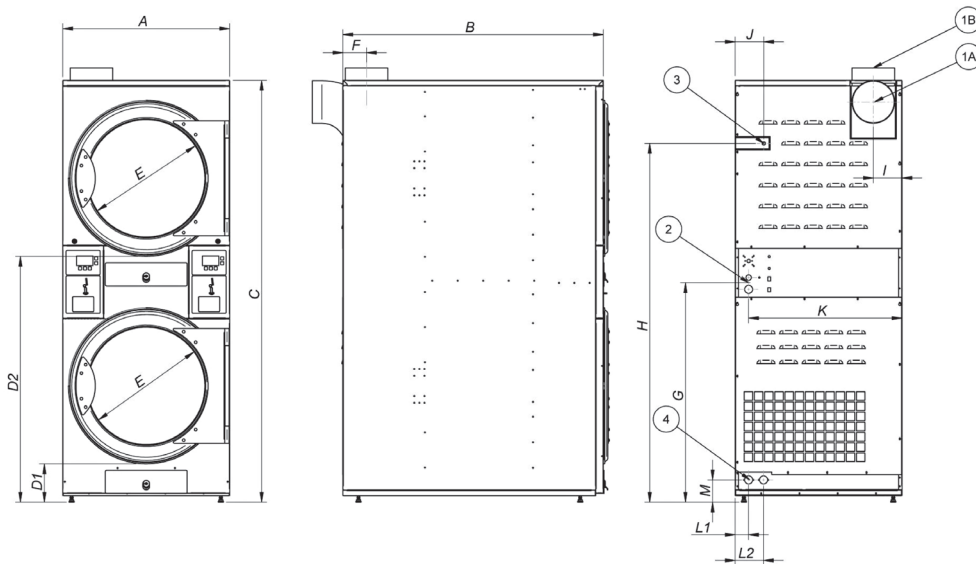

- 1A. Fumes outlet (rear option)
- 1B. Fumes outlet (upper option)
- 02. Electrical connection
- 03. Gas connection
- 04. Anti fire water valves

	A	B	C	D1	D2	E	F	G	H	I	J	K	L1	L2	M
MTD-2-25-MP	785	955	1.980	189	1.164	574	111	1.031	1.686	135	135	721	63	133	105
MTD-2-37-MP	785	1.225	1.980	189	1.164	574	111	1.031	1.686	135	135	721	63	133	105

4317 E. Genesee Street Suite 100 DeWitt, New York 13214 USA
 Phone: 315 446-2180 Fax: 315-446-2431
 E-mail: sales@maxico.com

