

TUMBLE DRYERS

MTD-25
MTD-35

FEATURES

- Construction in grey skinplate, stainless steel look.
- Big loading door (opening of 180°).
- Direct drive through a gearbox, no pulley.
- **Timer range:** Analogic control with time and temperature selection. Light indication of heating. (These models do not allow the moisture control option).
- **Digital PSM range:** Electronic control. Easy and intuitive to use, the electronic control offers a complete control of the process.
- REVERSE DRUM: All models offer the reverse turning of the drum.
- STAINLESS STEEL DRUM standard.
- AXIRAD AIR FLOW: Mixed axial-radial airflow to optimise and maximise the airflow circuit in the drum.
- GENTLE DRY: The new drum with stamped holes makes sure the linen is gently handled.
- New filter drawer with wide surface and improved airflow.
- Cool Down: Anti-wrinkle at the end of cycle.
- Models available in electric, gas or steam heating.
- **Self-Service:** Digital PSM range have several payment options for Laundromats: to work with centralized payment systems, with coin / token, or with prepay card systems. Electric and gas heated models.



OPTIONS

- SMART DRY: Intelligent Moisture Control. (Digital PSM models).
- FIRE EXTINGUISHER: Integrated Fire Extinguishing System. (Digital PSM models).
- Double doorglass.
- Stainless steel body.
- Stainless steel front panel.
- Low pressure steam battery.
- Model versions in 60 Hz.
- Marine versions 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



ELECTRONIC CONTROL



AXIRAD AIR FLOW



REVERSE DRUM



SMART DRY



STAINLESS STEEL DRUM



FIRE EXTINGUISHER




FULL FLOW



GENTLE DRY

TECHNICAL DATA	UNIT.	MTD-25	MTD-35		
CAPACITY					
Capacity	Lb	25	35		
Capacity	Kg	11	16		
Hourly Output	Kg/h	21	33		
Evaporation capacity	l/h	10,9	17,2		
DRUM					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	976	976		
Load hole bottom height	mm	689	689		
Drum length	mm	475	746		
Drum volume	l	210	330		
POWER					
Drum motor power	Kw	0,25	0,25		
Fan Motor Power	Kw	0,25	0,25		
Total Installed power	Kw	12,55	18,55		
Electric Heating (Installed power)	Kw	12	18		
Gas heating (installed Power) in kW	Kw	20,51	20,51		
Gas heating (installed el. power)	Kw	0,55	0,55		
Steam heating (Steam Power KW)	Kw	30	30		
Steam heating (installed el. power)	Kw	0,55	0,55		
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + T	Nº x mm2 / A	3 x 35 / 63A	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 10 / 40A	4 x 1,5 / 20A	4 x 16 / 63A	4 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 4 / 25A	5 x 1,5 / 20A	5 x 10 / 32A	5 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	3/4"		3/4"	
Ø Condensed (Steam models)	BSP	3/4"		3/4"	
DIMENSIONS / PACKING DIMENSIONS					
Width / Width	mm	785 / 865		785 / 865	
Depth / Depth	mm	840 / 940		1110 / 1210	
Height / Height	mm	1694 / 1840		1694 / 1840	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	172 / 180		187 / 200	
OTHERS					
Max airflow	m3/h	850		850	
Ø Fume exhaust	mm	200		200	
Sound level	dB	64		64	

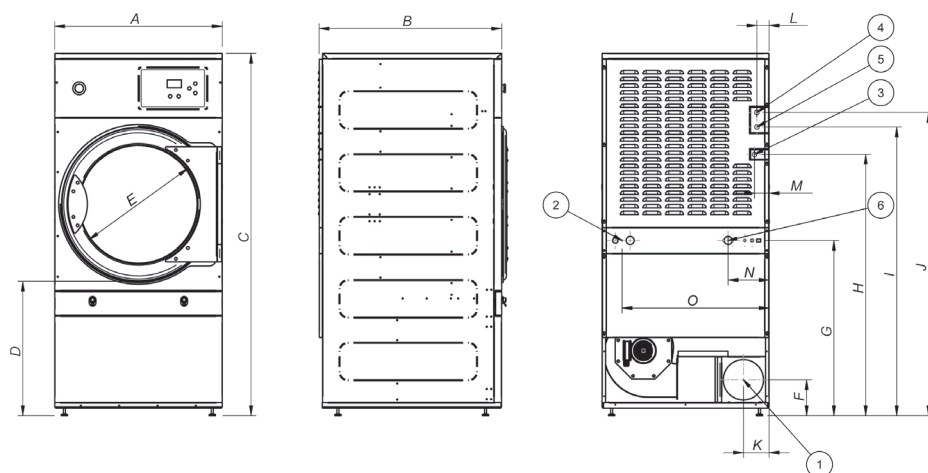

- 01. Fumes outlet
- 02. Electrical connection
- 03. Gas connection
- 04. Steam connection
- 05. Condensation outlet
- 06. Anti fire water valve

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
MTD-25	785	840	1.700	618	574	168	821	1.226	1.354	1.422	195	56	68	192	690
MTD-35	785	1.010	1.700	618	574	168	821	1.226	1.354	1.422	195	56	68	192	690

4317 E. Genesee Street Suite 100 DeWitt, New York 13214 USA
Phone: 315 446-1002 Fax: 315-446-2431 E-mail:
sales@maxico.com

