

TUMBLE DRYERS

MTD-55

FEATURES

- Construction in grey skinplate, stainless steel look.
- Big loading door (opening of 180°).
- Direct drive through a gearbox, no pulley.
- **MT models:** Analogic control with time and temperature selection. Light indication of heating. (These models do not allow the moisture control option).
- **MP models:** Electronic control. Easy and intuitive to use, the electronic control offers a complete control of the process.
- REVERSE DRUM: All models offer the reverse turning of the drum.
- STAINLESS STEEL DRUM standard.
- AXIRAD AIR FLOW: Mixed axial-radial airflow to optimise and maximise the airflow circuit in the drum.
- GENTLE DRY: The new drum with stamped holes makes sure the linen is gently handled.
- New filter drawer with wide surface and improved airflow.
- Cool Down: Anti-wrinkle at the end of cycle.
- Models available in electric, gas or steam heating.
- **Self-Service:** MP models have several payment options for Laundromats: to work with centralized payment systems, with coin / token, or with prepay card systems. Electric and gas heated models.



OPTIONS

- SMART DRY: Intelligent Moisture Control. (MP models).
- FIRE EXTINGUISHER: Integrated Fire Extinguishing System. (MP models).
- Double doorglass.
- Stainless steel body.
- Stainless steel front panel.
- Low pressure steam battery.
- Model versions in 60 Hz.
- Marine versions 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



ELECTRONIC CONTROL



AXIRAD AIR FLOW



REVERSE DRUM



SMART DRY



STAINLESS STEEL DRUM



FIRE EXTINGUISHER




FULL FLOW



GENTLE DRY

TECHNICAL DATA	UNIT.	MTD-55	
CAPACITY			
Capacity	Lb	55	
Capacity	Kg	23	
Hourly Output	Kg/h	46	
Evaporation capacity	l/h	23,9	
DRUM			
Ø Drum	mm	855	
Ø Door	mm	574	
Door center height	mm	1030	
Load hole bottom height	mm	743	
Drum length	mm	800	
Drum volume	l	460	
POWER			
Drum motor power	Kw	0,37	
Fan Motor Power	Kw	0,55	
Total Installed power	Kw	24,97	
Electric Heating (Installed power)	Kw	24	
Gas heating (installed Power) in KW	Kw	31	
Gas heating (installed el. power)	Kw	0,97	
Steam heating (Steam Power KW)	Kw	49,2	
Steam heating (installed el. power)	Kw	0,97	
CONNECTIONS		ELECTRICAL	STEAM / GAS
Tension 230V - I + T	Nº x mm2 / A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 25 / 80A	4 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 40A	5 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"	
Ø Steam inlet	BSP	1"	
Ø Condensed (Steam models)	BSP	1"	
DIMENSIONS / PACKING DIMENSIONS			
Width / Width	mm	890/970	
Depth / Depth	mm	1245/1345	
Height / Height	mm	1812/1940	
Height without heating battery	mm	-	
Net weight / Gross weight	Kg	210/230	
OTHERS			
Max airflow	m3/h	1200	
Ø Fume exhaust	mm	200	
Sound level	dB	65	

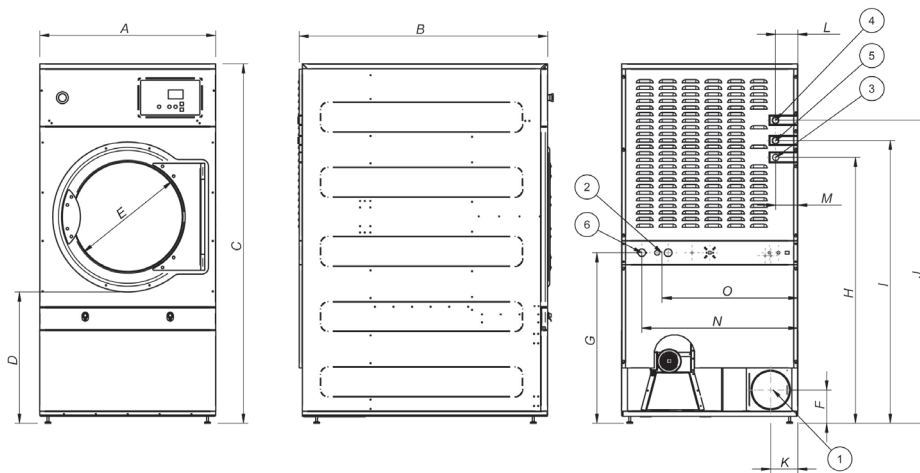

- 01. Fumes outlet
- 02. Electrical connection
- 03. Gas connection
- 04. Steam connection
- 05. Condensation outlet
- 06. Anti fire water valve

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
MTD-55	890	1.245	1.817	672	574	168	862	1.344	1.430	1.532	137	113	112	787	685

4317 E. Genesee Street Suite 100 DeWitt, New York 13214 USA
 Phone: 315 446-2180 Fax: 315-446-2431
 E-mail: sales@maxico.com

