

TUMBLE DRYERS

MTD-60

MTD-80

FEATURES

- Construction in grey skinplate, stainless steel look.
- Big loading door (opening of 180°).
- Transmission by pulley and belt, with inverter.
- Front subjection by 2 strong and high-resistant wheels.
- **MT models:** Analogic control with time and temperature selection. Light indication of heating. (These models do not allow the moisture control option).
- **MP models:** Electronic control. Easy and intuitive to use, the electronic control offers a complete control of the process.
- REVERSE DRUM: All models offer the reverse turning of the drum.
- STAINLESS STEEL DRUM standard.
- AXIRAD AIR FLOW: Mixed axial-radial airflow to optimise and maximise the airflow circuit in the drum.
- GENTLE DRY: The new drum with stamped holes makes sure the linen is gently handled.
- New filter drawer with wide surface and improved airflow.
- Cool Down: Anti-wrinkle at the end of cycle.
- Models available in electric, gas or steam heating.
- **Self-Service:** Digital PSM range have several payment options for Laundromats: to work with centralized payment systems, with coin / token, or with prepay card systems. Electric and gas heated models.

OPTIONS

- SMART DRY: Intelligent Moisture Control. (MP models).
- FIRE EXTINGUISHER: Integrated Fire Extinguishing System. (MP models).
- Double doorglass.
- Stainless steel body.
- Stainless steel front panel.
- Low pressure steam battery.
- Model versions in 60 Hz.
- Marine versions 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



ELECTRONIC CONTROL



AXIRAD AIR FLOW



REVERSE DRUM



SMART DRY



STAINLESS STEEL DRUM



FIRE EXTINGUISHER




FULL FLOW



GENTLE DRY

TECHNICAL DATA	UNIT.	MTD-60	MTD-80		
CAPACITY					
Capacity 1/18	lb	62	80		
Capacity 1/20	lb	69	82		
Hourly Output	lb/h	121	145		
Evaporation capacity	l/h	28,6	34,3		
DRUM					
Ø Drum	mm	947	947		
Ø Door	mm	802	802		
Door center height	mm	1.040	1.040		
Load hole bottom height	mm	640	640		
Drum length	mm	780	936		
Drum volume	l	550	660		
POWER					
Drum motor power	Kw	0,55	0,55		
Fan Motor Power	Kw	0,55	0,55		
Total Installed power	Kw	31,15	37,15		
Electric Heating (Installed power)	Kw	30	36		
Gas heating (installed Power) in KW	Kw	41	41		
Gas heating (installed el. power)	Kw	1,15	1,15		
Steam heating (Steam Power KW)	Kw	50,1	50,1		
Steam heating (installed el. power)	Kw	1,15	1,15		
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 35 / 100A	4 x 1,5 / 20A	4 x 50 / 125A	4 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 16 / 63A	5 x 1,5 / 20A	5 x 16 / 63A	5 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	1"		1"	
Ø Condensed (Steam models)	BSP	1"		1"	
DIMENSIONS / PACKING DIMENSIONS					
Width / Width	mm	985/1.065		985/1.065	
Depth / Depth	mm	1.054/1.154		1.210/1.310	
Height / Height	mm	1.946/2.080		1.946/2.080	
Height without heating battery	mm	-		-	
Net weight / Gross weight	lb	507/573		573/628	
OTHERS					
Max airflow	m3/h	1.200		1.200	
Ø Fume exhaust	mm	200		200	
Sound level	dB	65		65	

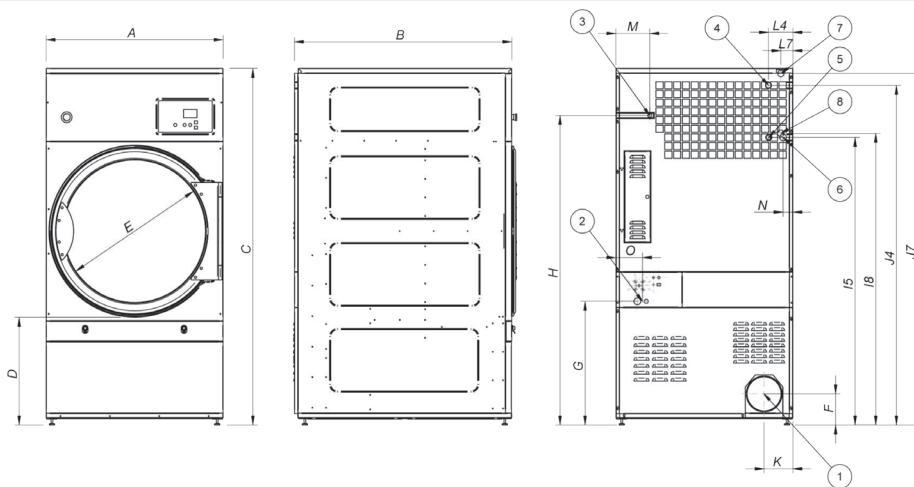

- 01. Fumes outlet
- 02. Electrical connection
- 03. Gas connection
- 04. Steam connection galva battery
- 05. Condensation outlet galva battery
- 06. Anti fire water valve
- 07. Steam connection stainless battery
- 08. Condensation outlet stainless battery

	A	B	C	D	E	F	G	H	I5	I8	J4	J7	K	L4	L7	M	N	O
MTD-60	985	1.054	1.946	577	802	172	685	1.715	1.594	-	1.883	-	160	134	-	188	55	148
MTD-80	985	1.210	1.946	577	802	172	685	1.715	1.594	1.616	1.883	1.948	160	134	67	188	55	690

4317 E. Genesee Street Suite 100 DeWitt, New York 13214 USA

Phone: 315 446-2180 Fax: 315-446-2431

E-mail: sales@maxico.com

