

TUMBLE DRYERS

ECONOMY LINE MTDE-60-MT, MTDE-80-MT

FEATURES

- Tumble dryer in galvanised steel.
- Big loading door (opening of 180°).
- Transmission is by means of a pulley and Poly-V belt, as well as supporting wheels in the front.
- Time and temperature selection. (These models do not allow the moisture control option).
- REVERSE DRUM: All models offer the reverse turning of the drum.
- Drum in galvanised steel.
- Radial airflow circuit.
- New filter drawer with wide surface and improved airflow.
- Cool Down: Anti-wrinkle at the end of cycle.
- Models available in electric or gas heating.



OPTIONS

- Version in 60 Hz.
- Marine versions 440V III 60 Hz No neutral or 480V III 60 Hz No neutral.



ELECTRONIC CONTROL



AXIRAD AIR FLOW



REVERSE DRUM



SMART DRY



STAINLESS STEEL DRUM



FIRE EXTINGUISHER




FULL FLOW



GENTLE DRY

TECHNICAL DATA	UNIT.	MTDE-60-MT	MTDE-80-MT		
CAPACITY					
Capacity	Lb	60	80		
Capacity	Kg	28	35		
Hourly Output	Kg/h	55	66		
Evaporation capacity	l/h	28,6	34,3		
DRUM					
Ø Drum	mm	947	947		
Ø Door	mm	802	802		
Door center height	mm	1.040	1.040		
Load hole bottom height	mm	640	640		
Drum length	mm	780	936		
Drum volume	l	550	660		
POWER					
Drum motor power	Kw	0,55	0,55		
Fan Motor Power	Kw	0,55	0,55		
Total Installed power	Kw	31,15	37,15		
Electric Heating (Installed power)	Kw	30	36		
Gas heating (installed Power) in KW	Kw	41	41		
Gas heating (installed el. power)	Kw	1,15	1,15		
Steam heating (Steam Power KW)	Kw	50,1	50,1		
Steam heating (installed el. power)	Kw	1,15	1,15		
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 35 / 100A	4 x 1,5 / 20A	4 x 50 / 125A	4 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 16 / 63A	5 x 1,5 / 20A	5 x 16 / 63A	5 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
DIMENSIONS / PACKING DIMENSIONS					
Width / Width	mm	985/1.065		985/1.065	
Depth / Depth	mm	1.054/1.154		1.210/1.310	
Height / Height	mm	1.946/2.080		1.946/2.080	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	230/260		260/285	
OTHERS					
Max airflow	m3/h	1.200		1.200	
Ø Fume exhaust	mm	200		200	
Sound level	dB	65		65	

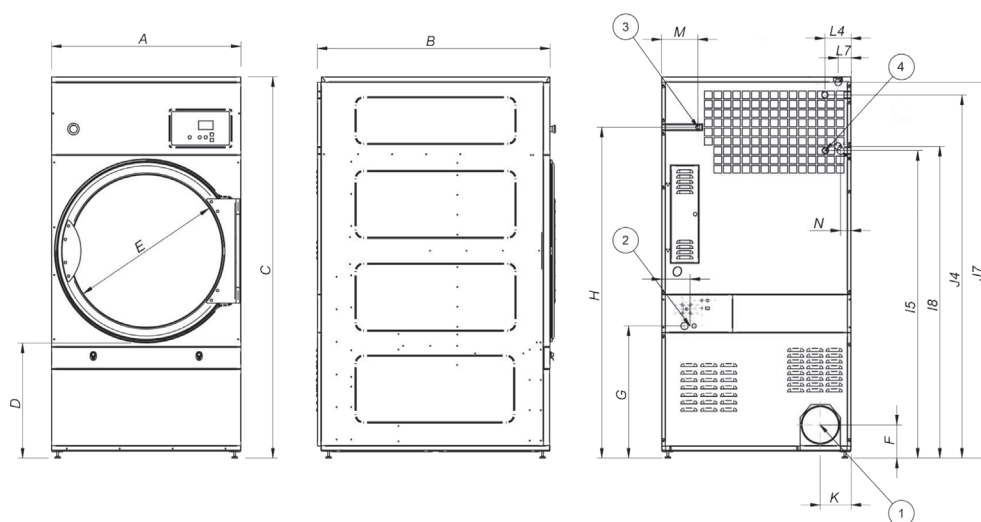

- 01. Fumes outlet
- 02. Electrical connection
- 03. Gas connection
- 04. Condensation outlet galva battery

	A	B	C	D	E	F	G	H	I5	I8	J4	J7	K	L4	L7	M	N	O
MTDE-60-MT	985	1.054	1.946	577	802	172	685	1.715	1.594	-	1.883	-	160	134	-	188	55	148
MTDE-80-MT	985	1.210	1.946	577	802	172	685	1.715	1.594	1.616	1.883	1.948	160	134	67	188	55	690

4317 E. Genesee Street Suite 100 DeWitt, New York 13214 USA
 Phone: 315 446-2180 Fax: 315-446-2431
 E-mail: sales@maxico.com

