

MEDIUM SPIN WASHER

THE PERFECT BALANCE BETWEEN QUALITY AND PRICE

MWCM-60

FEATURES

- Medium spin rigid-mounted washer extractor.
- It is important to fix the machine to the floor (anchoring base included).
- G Force 200.
- Body, drum and tub in stainless steel.
- Detergent dispenser with 4 compartments.
- 8 signals for automatic liquid dosing, programmable in time and delay.
- 3 water inlets.
- These machines have electronic control of imbalance with frequency inverter, that detects the unbalanced load before spinning. Standard frequency: 50 - 60 Hz.
- New microprocessor with touch screen. 26 preset programs.
- Possibility of programming, exporting and importing programs without limit, software updates, through USB port, using USB drive.
- Traceability standard: All washing process (temperatures, water levels) is stored in the washer and can be extracted to a PC by means of a USB drive.
- RS-485 serial communication port for monitoring / remote management.
- Wet Cleaning standard in the microprocessor: fully adjustable water levels and washing speed for delicate.
- Optimal loading standard to optimize water and chemicals consumptions.
- LOADING AID feature with water and rotation control for easy loading of the linen.
- Self-service version available by installing a central pay or coin meter on the standard model.
- CE, WRAS and GOST approved product. Optional version for ETL certified product.

OPTIONS

- Double drain kit, allow the recovery of the water, with important water savings.
- Relay card with 6 extra dosing signals: total of 14 signals in the machine.
- Steam kit to transform an electric or hot water heated machine into steam version.
- Self-Service Kits: Coiner and box; Central pay; Delayed opening door option in case of power outage.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



TOUCH CONTROL



OPTIMAL LOADING



STAINLESS
STEEL STANDARD



IMBALANCE
INVERTER



EASY MAINTENANCE



HOT & COLD MIX



WET CLEANING




THIRD WATER INTAKE



EFFICIENT DRUM

TECHNICAL DATA		UNIT.	MWCM-60
DRUM			
Load capacity	lb		62
Volume	l		250
Diameter	mm		700
Depth	mm		670
GENERAL DETAILS			
Washing speed / Spining speed	r.p.m.		47/690
G Factor	-		200
Maximum force transmitted	KN		3,2 ±1
Frequency-dynamic force	Hz		11,5
Self-service version	-		Yes
Double drain	-		Opt
DOOR			
Height center door / Height door	mm		700/440
Diameter	mm		373
POWER			
Motor	kW		3
Heating (Electric model)	kW		18
Max. power (Electric model)	kW		19
Max. power (steam and hot water)	kW		3
CONNECTIONS		ELECTRICAL	STEAM / HOT WATER
Tension 230V- I + N + T	N° x mm2 / A	3 x 25 / 100A	3 x 1,5 / 16A
Tension 230V- III + T	N° x mm2 / A	3 x 10 / 50A	-
Tension 400V- III + N + T	N° x mm2 / A	3 x 4 / 32A	-
Steam inlet (Steam mod.)	inch		3/4"
Maximum steam consumption (Steam mod.)	Kg/h		15
Water inlet	inch		3/4"
Water main pressure	Kgs/cm ²		2-4
Maximum water consumption*	Lit/h		176,1
Drain	mm/inch		3"
Drainage capacity	Lit/min		200
DIMENSIONS / PACKING DIMENSIONS			
Width / Width	mm		884/930
Depth / Depth	mm		1.011/1.150
Height / Height	mm		1.307/1.500
Net weight / Gross weight	kg		340/370
Volume	m ³		1,60

* N°20 Program, 75% load

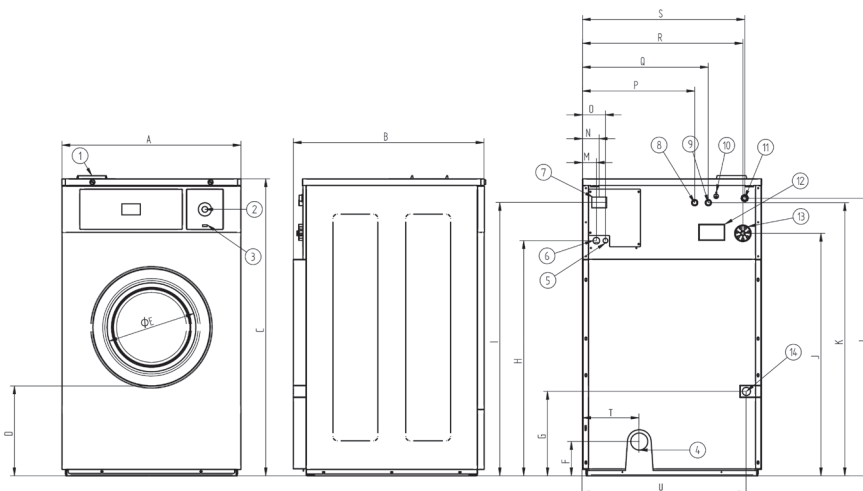

- 01. Soap dispenser
- 02. Emergency stop
- 03. Usb port
- 04. Drain
- 05. Electric connection to liquid soap pumps
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Ground connection
- 11. Cold water inlet
- 12. Blur output / water overload
- 13. Liquid soap connection
- 14. Steam connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
MWCM-60	884	1.011	1.307	440	373	138	543	1.035	1.203	1.053	1.218	1.218	61	74	101	410	490	769	810	268	820

4317 E. Genesee Street Suite 100 DeWitt, New York 13214
 USA Phone: 315 446-2180 Fax: 315-446-2431
 E-mail: sales@maxico.com

