

HIGH SPIN WASHER

THE MOST EFFICIENT FOR THE MOST DEMANDING CUSTOMERS

MWFH 60-80

FEATURES

- High spin washer extractor. No need to be anchored to the floor.
- G Force 450.
- Body, drum and tub in stainless steel.
- Detergent dispenser with 4 compartments.
- 8 signals for automatic liquid dosing, programmable in time and delay.
- 3 water inlets.
- These machines have electronic control of imbalance with frequency inverter, that detects the unbalanced load before spinning. Standard frequency: 50 - 60 Hz.
- New microprocessor with touch screen. 26 preset programs.
- Possibility of programming, exporting and importing programs without limit, software updates, through USB port, using USB drive.
- Traceability standard: All washing process (temperatures, water levels) is stored in the washer and can be extracted to a PC by means of a USB drive.
- RS-485 serial communication port for monitoring / remote management.
- Wet Cleaning standard in the microprocessor: fully adjustable water levels and washing speed for delicate.
- Optimal loading standard to optimize water and chemicals consumptions.
- LOADING AID feature with water and rotation control for easy loading of the linen.
- Self-service version available by installing a central pay or coin meter on the standard model.
- CE, WRAS and GOST approved product. Optional version for ETL certified product.

OPTIONS

- Double drain kit, allow the recovery of the water, with important water savings.
- Leveling feet.
- Bottom cover and plinth for loading height 850 mm from door bottom. Model MWFH-60.
- Bottom cover and plinth for having same height in washers. Model MWFH-60.
- Relay card with 6 extra dosing signals: total of 14 signals in the machine.
- Weighing sensor system on feet.
- Steam kit to transform an electric or hot water heated machine into steam version.
- Self-Service Kits: Coiner and box; Central pay; Delayed opening door option in case of power outage.
- Voltage 230 V III 50/60 Hz. Model MWFH-80.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



TOUCH CONTROL



HOT & COLD MIX



OPTIMAL LOADING



WET CLEANING



STAINLESS
STEEL STANDARD



THIRD WATER INTAKE



IMBALANCE
INVERTER



EFFICIENT DRUM




EASY MAINTENANCE



AUTOWEIGHT

TECHNICAL DATA	UNIT.	MWFH-60	MWFH-80			
DRUM						
Load capacity	lb	60	80			
Volume	l	250	350			
Diameter	mm	770	860			
Depth	mm	530	602			
GENERAL DETAILS						
Washing speed / Spining speed	r.p.m.	45/1.035	42,5/975			
G Factor	-	450	450			
Maximum force transmitted	KN	4,9 ±1,75	7,5 ±2,45			
Frequency-dynamic force	Hz	15	14,3			
Sound level	dB	70	70			
Self-service version	-	Yes	Yes			
Double drain	-	Opt	Opt			
Weighing System / Tilting System	-	Opt/No	Opt/No			
DOOR						
Height center door / Height door	mm	865/600	885/540			
Diameter	mm	373	560			
POWER						
Motor	kW	3	4			
Heating (Electric model)	kW	18	21			
Max. power (Electric model)	kW	19	22			
Max. power (steam and hot water)	kW	3	4			
CONEXIONES		ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER	
Tension 230V - I + N + T	N° x mm2 / A	3 x 25 / 100A	3 x 1,5 / 16A	-	-	
Tension 230V - III + T	N° x mm2 / A	3 x 10 / 50A	-	3 x 25 / 100A	3 x 1,5 / 6A	
Tension 400V - III + N + T	N° x mm2 / A	3 x 4 / 32A	-	3 x 16 / 63A	3 x 1,5 / 16A	
Steam inlet (Steam mod.)	inch	3/4"		3/4"		
Maximum steam consumption (Steam mod.)	Kg/h	15		18		
Water inlet	inch	3/4"		3/4"		
Water main pressure	Kgs/cm ²	2-4		2-4		
Maximum water consumption*	Lit/h	175,5		261,3		
Drain	mm/inch	3"		3"		
Drainage capacity	Lit/min	200		200		
DIMENSIONS / PACKING DIMENSIONS						
Width / Width	mm	979/1.040			1.095/1.165	
Depth / Depth	mm	1.041/1.160			1.184/1.230	
Height / Height	mm	1.553/1.850			1.598/1.920	
Net weight / Gross weight	kg	490/545			750/820	
Volume	m ³	2,23			2,75	

* N°20 Program, 75% load

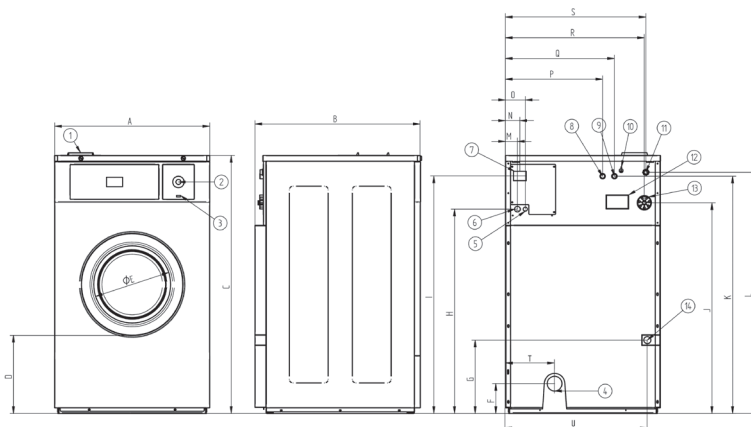

01. Soap dispenser
02. Emergency stop
03. Usb port
04. Drain
05. Electric connection to liquid soap pumps
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Ground connection
11. Cold water inlet
12. Blur output / water overload
13. Liquid soap connection
14. Steam connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
MWFH-60	979	1.041	1.553	610	373	130	532	1.279	1.343	1.282	1.462	1.462	61	74	101	506	586	864	906	367	909
MWFH-80	1.095	1.184	1.598	522	560	155	990	1.326	1.494	1.344	1.509	1.509	61	74	101	621	701	979	1.021	384	1.024

4317 E. Genesee Street Suite 100 DeWitt, New York 13214 USA
 Phone: 315 446-2180 Fax: 315-446-2431
 E-mail: sales@maxico.com



REV. 05/2017